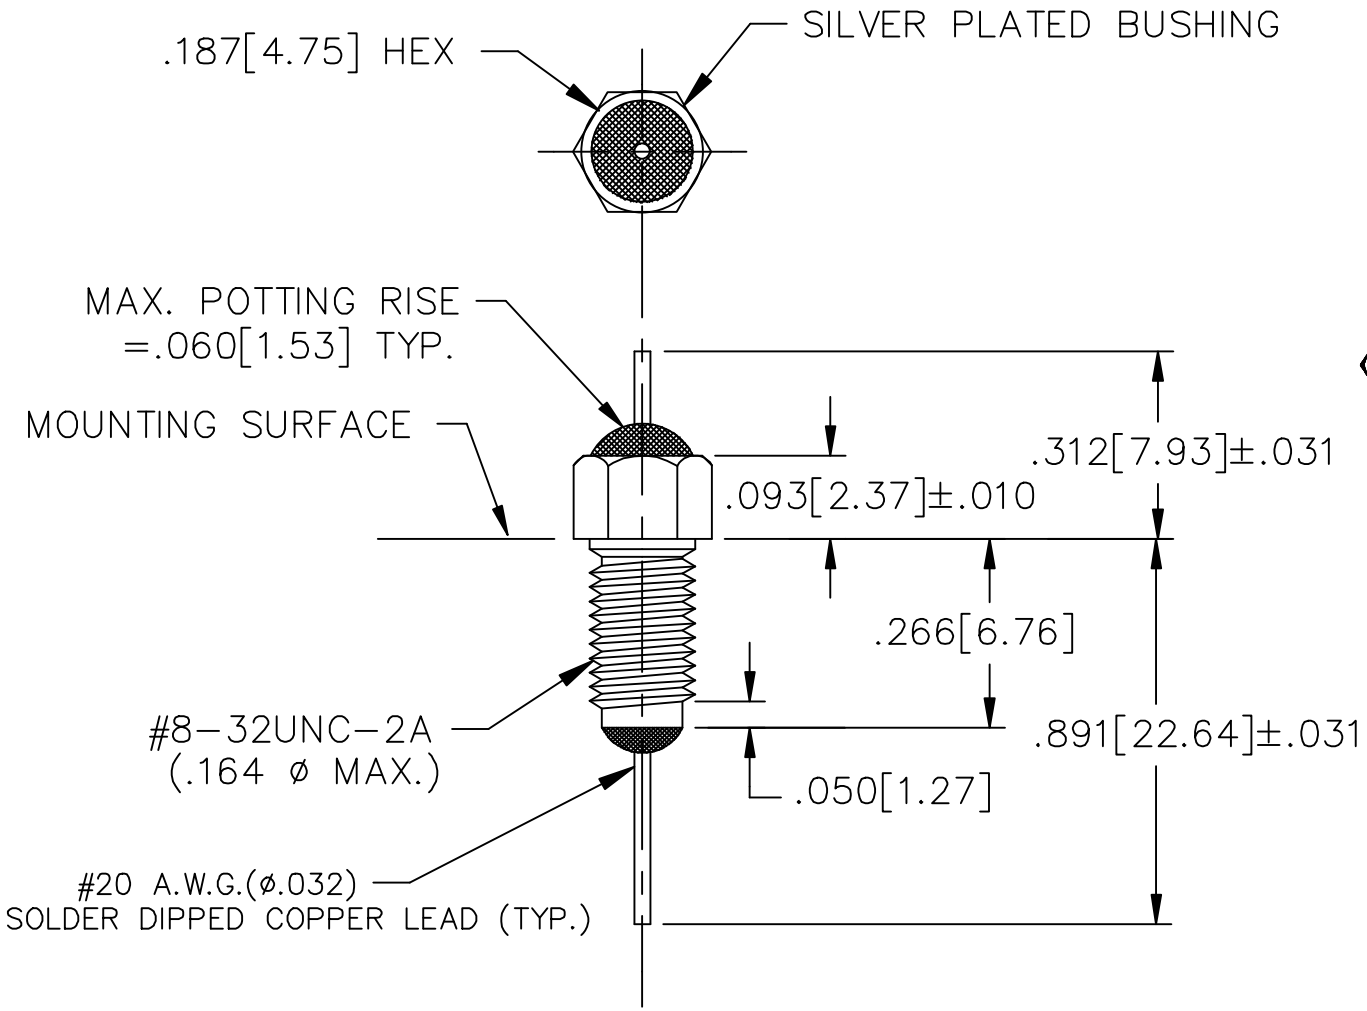


| | |
|---|---|
| CAPACITANCE | 3000pF GMV |
| TEMP. RANGE | -55°C TO +125°C |
| CURRENT | 10 AMP MAX. |
| WORKING VOLTAGE | 125°C 200 VDC |
| DC RESISTANCE | .01 Ohms MAX. |

I.L.@25°C, NO LOAD

13

| FREQ. MHz | I.L. (dB) |
|---|---|
| 10MHz | 5dB |
| 100MHz | 45dB |
| 1GHz | 70dB |
| 10GHz | 70dB |

SCHEMATIC



MARKING:

PART: S003

BAG PACK: SCI 1250-003
DATE CODE
LOT No.
QTY./BAG (200 MAX.)

NOTES:
1. MAX INSTALLATION TORQUE: 4in-lbs.
2. HARDWARE IS INCLUDED.

| REV. NO. | CHANGE NOTICE |
|---|---|
| 13 | CN #11628 |
| 12 | CN 208567 |
| 11 | CN 186587 |
| 10 | CN 176833 |
| 9 | CN 175872 |
| 8 | CN 166807 |
| 7 | CN 161800 |
| 6 | CN 154611 |
| 5 | CN 153682 |
| 4 | CN 152986 |
| 3 | CN 148961 |
| 2 | CN 148903 |
| 1 | CN 147402 |
| 0 | CN 147308 |

TOLERANCES UNLESS OTHERWISE SPECIFIED
Fractions ± 1/64
Dec. .xx±
Dec. .xxx± .010
Angles ±0° 30'
CODE IDENT. NO. OLSP2

api technologies corp.
FAIRVIEW PENNSYLVANIA

Dwn. KEVERLINE
Date 3-11-15
Engr. B.DEVINE
Scale NONE

Description
FLTR, SING, Pi, BSHG

1250-003