

Silicon Power Schottky Diode

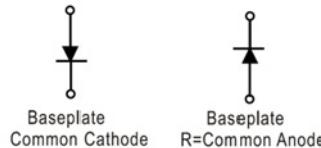
$V_{RRM} = 150 \text{ V - } 200 \text{ V}$

$I_{F(AV)} = 200 \text{ A}$

Features

- High Surge Capability
- Types from 150 V to 200 V V_{RRM}
- Not ESD Sensitive

D-67 Package



Maximum ratings, at $T_j = 25^\circ\text{C}$, unless otherwise specified ("R" devices have leads reversed)

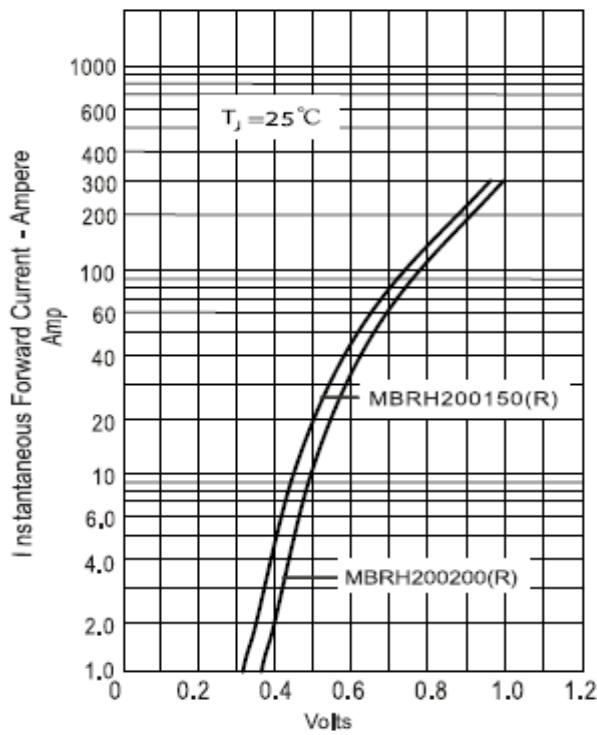
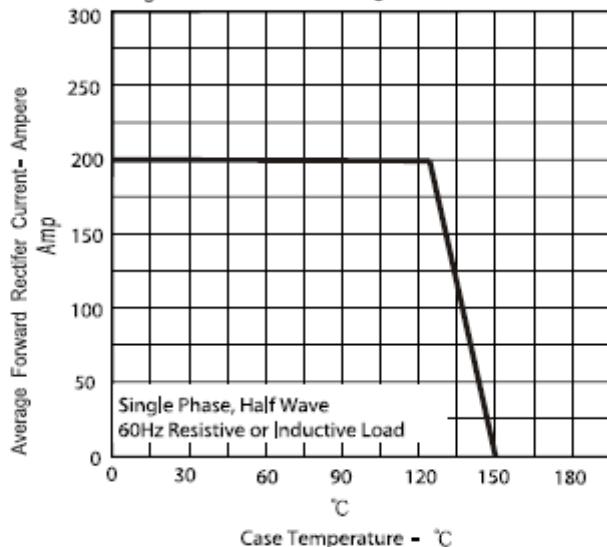
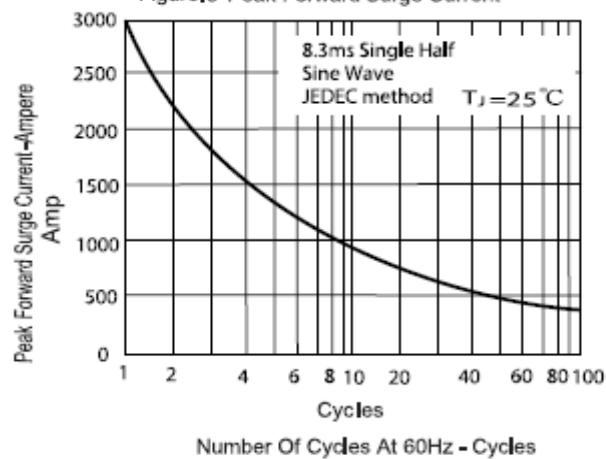
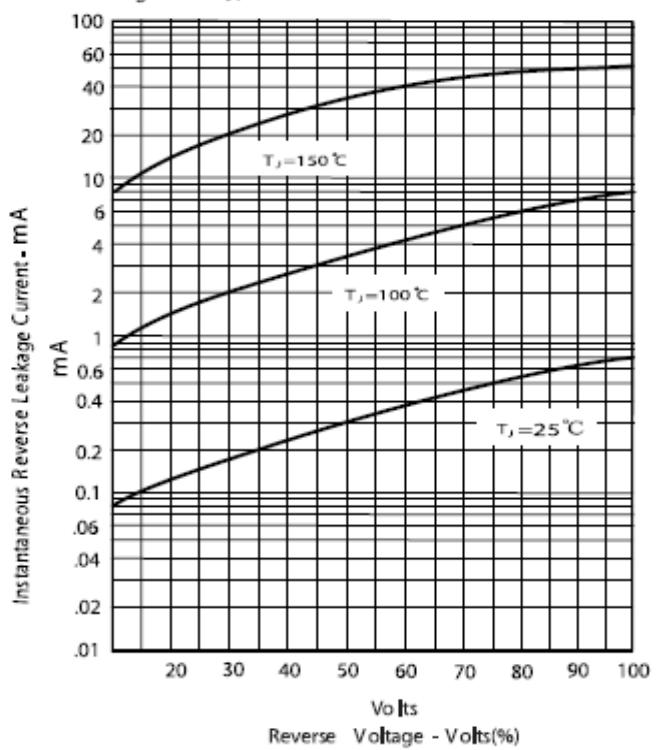
Parameter	Symbol	Conditions	MBRH200150(R)	MBRH200200(R)	Unit
Repetitive peak reverse voltage	V_{RRM}		150	200	V
RMS reverse voltage	V_{RMS}		106	141	V
DC blocking voltage	V_{DC}		150	150	V
Operating temperature	T_j		-55 to 150	-55 to 150	$^\circ\text{C}$
Storage temperature	T_{stg}		-55 to 150	-55 to 150	$^\circ\text{C}$

Electrical characteristics, at $T_j = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Conditions	MBRH200150(R)	MBRH200200(R)	Unit
Average forward current (per pkg)	$I_{F(AV)}$	$T_c = 125^\circ\text{C}$	200	200	A
Peak forward surge current	I_{FSM}	$t_p = 8.3 \text{ ms, half sine}$	3000	3000	A
Maximum instantaneous forward voltage	V_F	$I_{FM} = 200 \text{ A}, T_j = 25^\circ\text{C}$	0.88	0.92	V
Maximum instantaneous reverse current at rated DC blocking voltage	I_R	$T_j = 25^\circ\text{C}$ $T_j = 100^\circ\text{C}$ $T_j = 150^\circ\text{C}$	1 10 50	1 10 50	mA

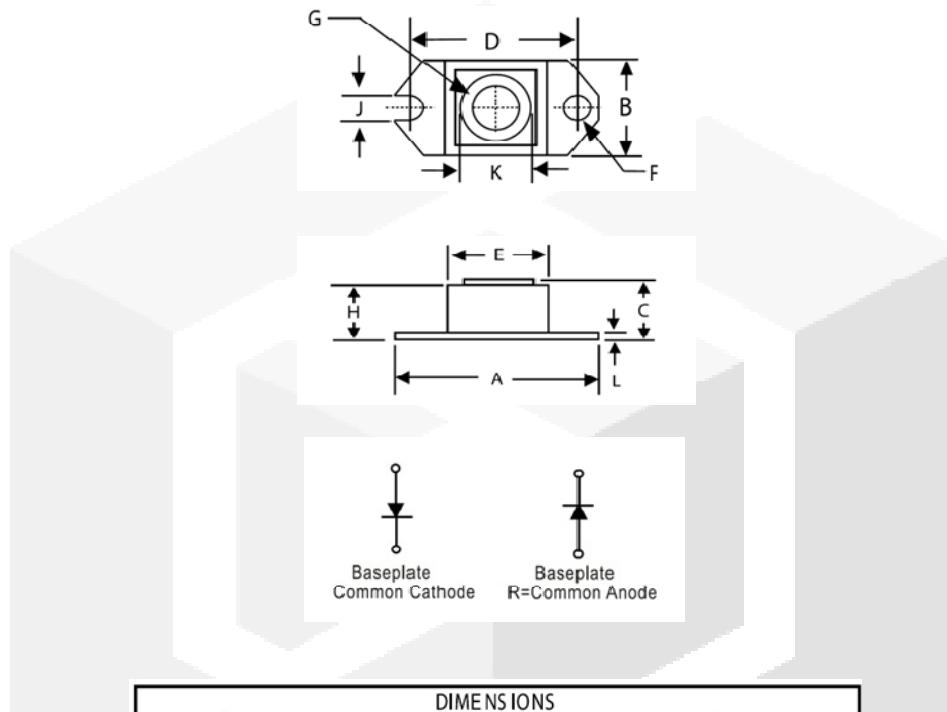
Thermal characteristics

Thermal resistance, junction-case	R_{eJC}	0.35	0.35	$^\circ\text{C/W}$
-----------------------------------	-----------	------	------	--------------------

Figure .1-Typical Forward Characteristics

Instantaneous Forward Voltage - Volts
Figure .2-Forward Derating Curve

Case Temperature - $^\circ\text{C}$
Figure .3-Peak Forward Surge Current

Number Of Cycles At 60Hz - Cycles
Figure .4- Typical Reverse Characteristics


Package dimensions and terminal configuration

Product is marked with part number and terminal configuration.



DIM	DIMENSIONS				NOTE	
	INCHES		MM			
	MIN	MAX	MIN	MAX		
A	1.515	1.560	38.48	39.62		
B	.725	.775	18.42	19.69		
C	.595	.625	15.11	15.88		
D	1.182	1.192	30.02	30.28		
E	.736	.744	18.70	18.90		
F	.152	.160	3.86	4.061	Ø	
G	1/4- 20 UNC					
H	.540	.580	13.72	14.73		
J	.156	.160	3.96	4.06		
K	.480	.492	12.20	12.50	Ø	
L	.120	.130	3.05	3.30		