

Fuseholder Open Design, 6.3 x 32 mm, Solder



500 VAC · 16 A (UL)



**Description**

- Screw or rivet fastening

**Standards**

- UL 4248-1  
- CSA C22.2 no. 4248.1

**Approvals**

- UL File Number: E39328

**References**

Last order possibility: 30.09.2017  
Last delivery date: 31.12.2017

**Weblinks**


[pdf datasheet](#), [html-datasheet](#), [General Product Information](#), [Packaging details](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [Distributor-Stock-Check](#), [Detailed request for product](#)

**Technical Data**

Fuse-Link	6.3 x 32 mm	Soldering Methods	Iron
Attachment	Screw or Rivet		<a href="#">Soldering Profile</a>
Terminal	Solder	Solderability	350 °C / 2 sec acc. to IEC 60068-2-20, Test Ta, method 2
Rated Voltage	500VAC (UL)	Resistance to Soldering Heat	350 °C / 10 sec acc. to IEC 60068-2-20, Test Tb, method 2
Rated current	16 A (UL)	Contact Resistance	< 5 mΩ at 20 mV
Admissible Ambient Air Temp.	-40 °C to 85 °C	Dielectric Strength	> 3 kV (50Hz; 1 min)
Climatic Category	40/085/21 acc. to IEC 60068-1	Impulse Withstand Voltage	> 4 kV between Life parts
Material: Socket	Thermoset, black, UL 94V-0	Insulation Resistance	> 10 MΩ between Life parts (500 VDC; 1 min)
Material: Terminals	Nickel-Silver		
Unit Weight	7.27 g		
Storage Conditions	0 °C to 60 °C, max. 70% r.h.		
Product Marking	Rated Voltage, Rated current, Approvals		

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [General Product Information](#)

**Dimension**

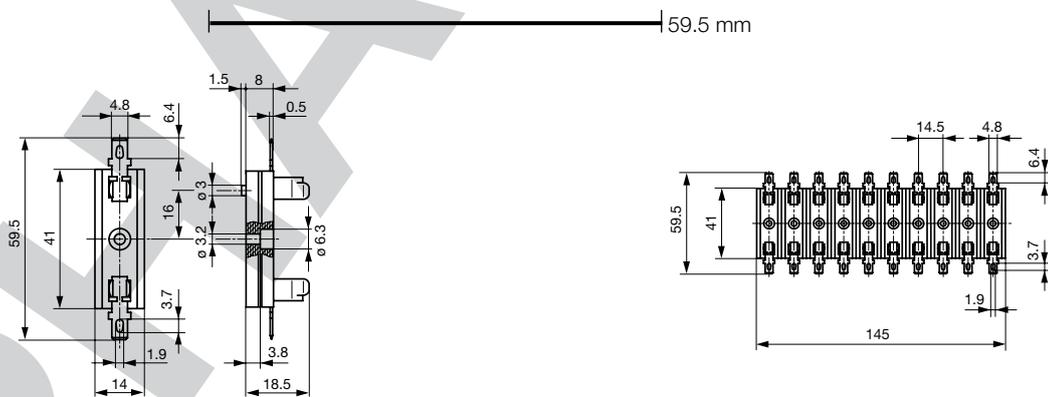

Variant 0031.6001

Variant 0031.6010

## All Variants

Holder	Strip	Order Number
●		0031.6001
	●	0031.6010

Availability for all products can be searched real-time:  
<http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

---

**Packaging Unit**      Bulk (100 pcs.)

---

PHASE-OUT

07.03.2017