





# **Application & Main Feature**

Commercial Grade (Safety Standard Approved)

## **Series**

**CS** Series

#### **Dimensions**

D 7.5mm Max.

5.0mm Max.

7.5mm +/-1.5mm 0.6mm +/-0.05mm

5.0mm +/-1.0mm

### Temperature Characteristic

B(+/-10%)

#### Rated Voltage

440Vac

#### Withstanding Voltage

2600Vac

## Capacitance

470pF

## Capacitance Tolerance

+/-10%

## Dissipation Factor

2.5% Max.

## Insulation Resistance


10000Mohm Min.


#### AEC-Q200


Not Applicable

#### Lead Length / Package Type

5mm for Bulk





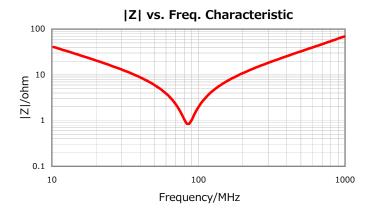

# **Temperature Characteristic**

