



NOTES:

1. MAX. MTG. TORQUE = 3lb-in.
2. HARDWARE IS INCLUDED.

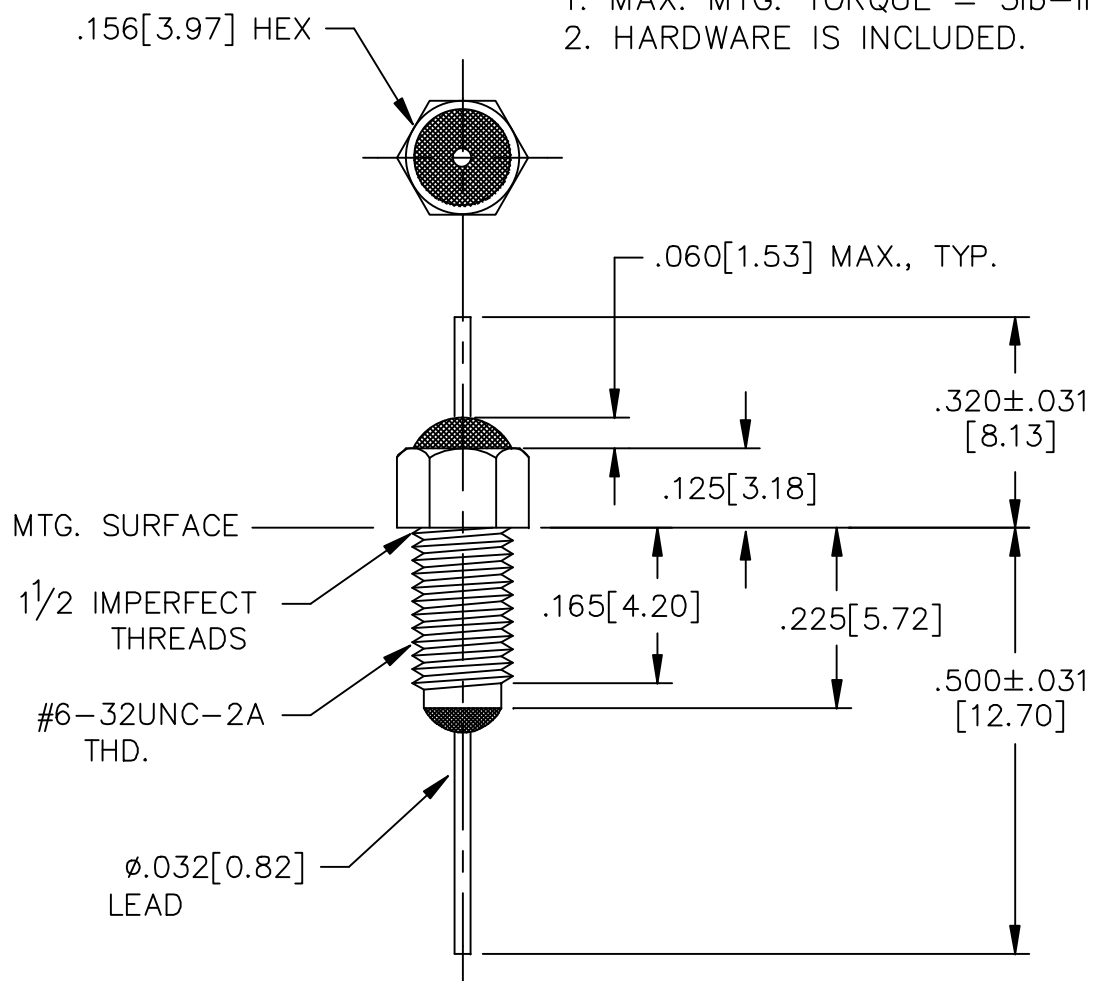

LEAD FINISH: SILVER	
BUSHING FINISH: SILVER	
CAPACITANCE	10pF ±20%
TEMP. RANGE	-55°C TO 125°C
CURRENT	10 AMP MAX.
WORKING VOLTAGE	85°C -- VDC MAX. 125°C 100 VDC MAX.
D.C. RESISTANCE	.01ohms MAX.
MIN. I.L. PER MIL-STD-220 AT 25°C NO LOAD	
FREQ. MHz	I.L. (db)
1	N/A
100	N/A
500	N/A
1 GHz	N/A
10 GHz	N/A

SCHEMATIC




MARKING:

PART: SF100M

BAG:

SCI 54F-779-073
DATE CODE
QTY/BAG (200 MAX.)

00	REV. NO.	TOLERANCES UNLESS OTHERWISE SPECIFIED
CN 40123-ENG	CHANGE NOTICE	Fractions ± 1/64
		Dec. .xx±
		Dec. .xxx± .005
		Angles ±0° 30'
		CODE IDENT. NO. OLSP2



SPECTRUM CONTROL INC.
Dwn. KAUFFMAN
Date 2-28-08
Engr. J.KRAUS
Scale NONE

FAIRVIEW
PENNSYLVANIA

Description FEED THRU
RESIN SEAL FILTER

54F-779-073

