



NOTES:

1. MAXIMUM MOUNTING TORQUE = 4lb-in.
2. HARDWARE IS INCLUDED.
3. THIS PART CODED "NCA". API TECHNOLOGIES DOES NOT HAVE CHANGE AUTHORITY. CUSTOMER APPROVAL REQUIRED BEFORE PRODUCT/PROCESS CHANGES CAN BE MADE.

36

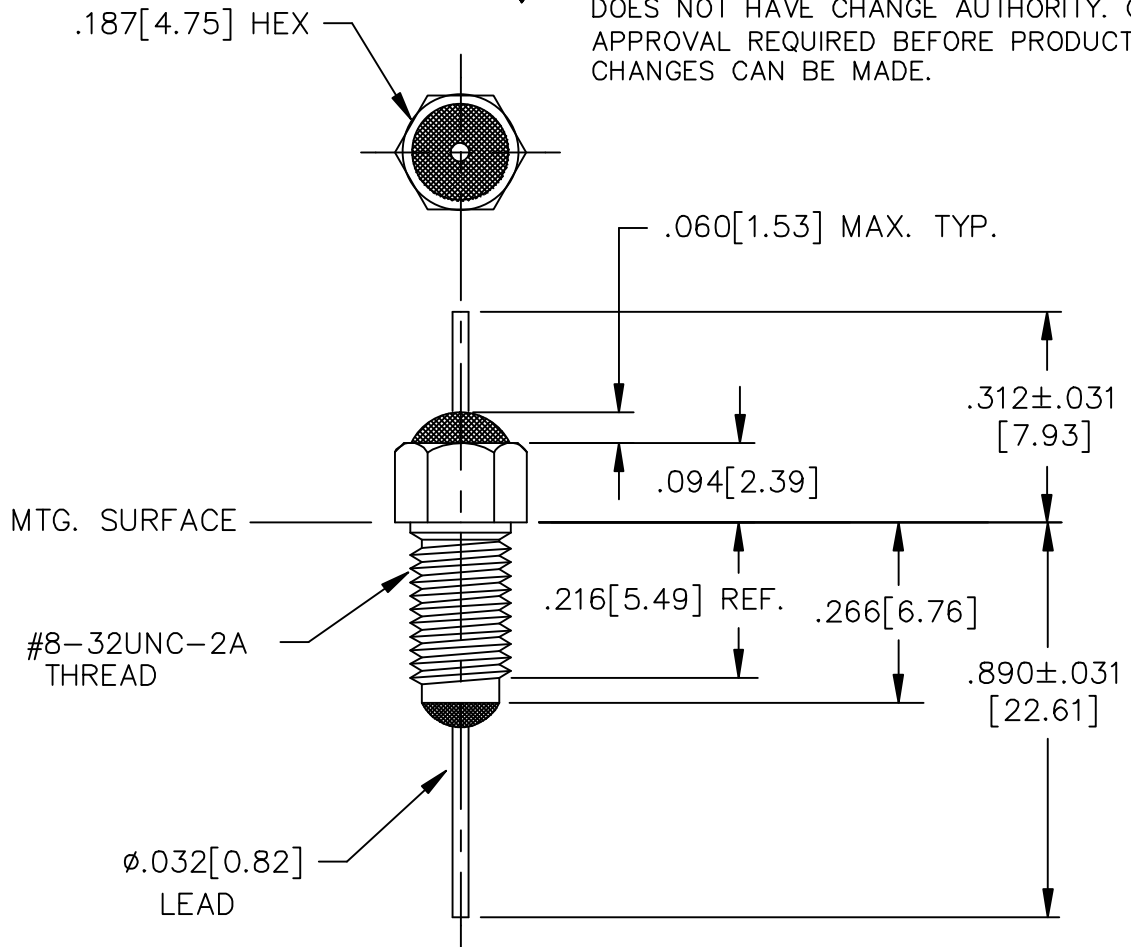


LEAD FINISH:	SOLDER
BUSHING FINISH:	SILVER
CAPACITANCE	3000pF
TEMP. RANGE	-55°C TO 125°C
CURRENT	10 AMP MAX.
WORKING VOLTAGE	85°C --- VDC MAX. 125°C 100 VDC MAX.
D.C. RESISTANCE	.01ohms MAX.
MIN. I.L. PER MIL-STD-220 AT 25°C NO LOAD	
FREQ. MHz	I.L. (db)
50	25
100	45
200	60
500	60
1-10 GHz	60



MARKING:
 PART: M15733/28-0001
 BAG: MIL 15733/28-0001
 OLSP2
 DATE CODE
 100VDC
 125°C
 10 AMPS
 XXX QTY/BAG (100 MAX.)
 P.O. XXX
 PACKAGE: TO BE MARKED
 SAME AS THE BAG.

	36	35	34	REV. NO.	TOLERANCES UNLESS OTHERWISE SPECIFIED
	CN 63365-ENG	CN 188901	CN. 184969	CHANGE NOTICE	Fractions ± 1/64
					Dec. .xx±
					Dec. .xxx±.010
					Angles ±0° 30'
					CODE IDENT. NO. OLSP2

api  FAIRVIEW PENNSYLVANIA
 technologies corp.

Dwn. KAUFFMAN	Description FEED THRU RESIN SEAL FILTER
Ckd. 6-01-98	
Apvd.	51-712-014
Scale NONE	