

**HiPerFRED<sup>2</sup>**

$V_{RRM}$  = 300V  
 $I_{FAV}$  = 2x 10A  
 $t_{rr}$  = 35ns


High Performance Fast Recovery Diode

Low Loss and Soft Recovery


Common Cathode

**Part number**

DPG20C300PB

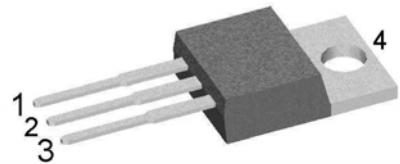

Backside: cathode

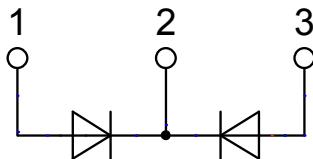**Features / Advantages:**

- Planar passivated chips
- Very low leakage current
- Very short recovery time
- Improved thermal behaviour
- Very low  $I_{rm}$ -values
- Very soft recovery behaviour
- Avalanche voltage rated for reliable operation
- Soft reverse recovery for low EMI/RFI
- Low  $I_{rm}$  reduces:
  - Power dissipation within the diode
  - Turn-on loss in the commutating switch

**Applications:**

- Antiparallel diode for high frequency switching devices
- Antisaturation diode
- Snubber diode
- Free wheeling diode
- Rectifiers in switch mode power supplies (SMPS)
- Uninterruptible power supplies (UPS)


**Package: TO-220**

- Industry standard outline
- RoHS compliant
- Epoxy meets UL 94V-0

## Fast Diode

Symbol	Definition	Conditions	Ratings			
			min.	typ.	max.	
$V_{RSM}$	max. non-repetitive reverse blocking voltage	$T_{VJ} = 25^\circ C$			300	V
$V_{RRM}$	max. repetitive reverse blocking voltage	$T_{VJ} = 25^\circ C$			300	V
$I_R$	reverse current, drain current	$V_R = 300 V$ $V_R = 300 V$	$T_{VJ} = 25^\circ C$ $T_{VJ} = 150^\circ C$		1 0.06	$\mu A$ mA
$V_F$	forward voltage drop	$I_F = 10 A$ $I_F = 20 A$ $I_F = 10 A$ $I_F = 20 A$	$T_{VJ} = 25^\circ C$ $T_{VJ} = 150^\circ C$		1.27 1.45 0.98 1.17	V V V V
$I_{FAV}$	average forward current	$T_C = 150^\circ C$ rectangular $d = 0.5$	$T_{VJ} = 175^\circ C$		10	A
$V_{F0}$ $r_F$	threshold voltage slope resistance } for power loss calculation only		$T_{VJ} = 175^\circ C$		0.74 17.7	V $m\Omega$
$R_{thJC}$	thermal resistance junction to case				2.3	K/W
$R_{thCH}$	thermal resistance case to heatsink			0.50		K/W
$P_{tot}$	total power dissipation		$T_C = 25^\circ C$		65	W
$I_{FSM}$	max. forward surge current	$t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}; V_R = 0 V$	$T_{VJ} = 45^\circ C$		140	A
$C_J$	junction capacitance	$V_R = 150 V$ $f = 1 \text{ MHz}$	$T_{VJ} = 25^\circ C$		15	pF
$I_{RM}$	max. reverse recovery current		$T_{VJ} = 25^\circ C$ $T_{VJ} = 125^\circ C$		3 5.5	A A
$t_{rr}$	reverse recovery time	$I_F = 10 A; V_R = 200 V$ $-di_F/dt = 200 A/\mu s$	$T_{VJ} = 25^\circ C$ $T_{VJ} = 125^\circ C$		35 45	ns ns

Package TO-220			Ratings		
Symbol	Definition	Conditions	min.	typ.	max.
		per terminal <sup>1)</sup>			Unit
$I_{RMS}$	RMS current	per terminal <sup>1)</sup>			35 A
$T_{VJ}$	virtual junction temperature		-55		175 °C
$T_{op}$	operation temperature		-55		150 °C
$T_{stg}$	storage temperature		-55		150 °C
Weight				2	g
$M_D$	mounting torque		0.4		0.6 Nm
$F_c$	mounting force with clip		20		60 N

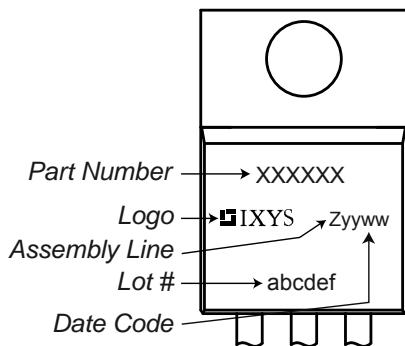**Product Marking****Part number**

D = Diode  
 P = HiPerFRED  
 G = extreme fast  
 20 = Current Rating [A]  
 C = Common Cathode  
 300 = Reverse Voltage [V]  
 PB = TO-220AB (3)


Ordering	Part Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	DPG20C300PB	DPG20C300PB	Tube	50	504134

Similar Part	Package	Voltage class
DPG20C300PN	TO-220ABFP (3)	300


**Equivalent Circuits for Simulation***\* on die level* $T_{VJ} = 175 \text{ }^{\circ}\text{C}$ 

$I$	$V_0$	$R_0$	Fast Diode	
$V_{0\max}$	threshold voltage	0.74		V
$R_{0\max}$	slope resistance *	14.5		$\text{m}\Omega$

## Outlines TO-220

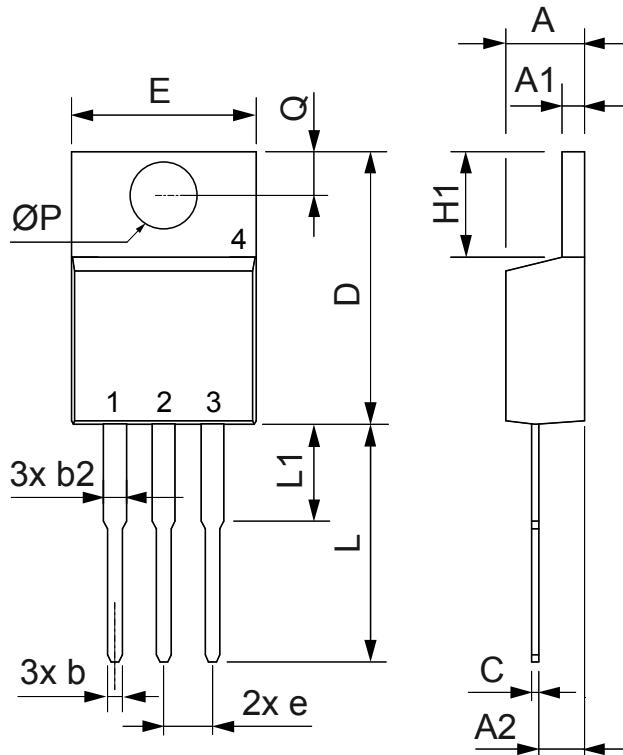

Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	4.32	4.82	0.170	0.190
A1	1.14	1.39	0.045	0.055
A2	2.29	2.79	0.090	0.110
b	0.64	1.01	0.025	0.040
b2	1.15	1.65	0.045	0.065
C	0.35	0.56	0.014	0.022
D	14.73	16.00	0.580	0.630
E	9.91	10.66	0.390	0.420
e	2.54	BSC	0.100	BSC
H1	5.85	6.85	0.230	0.270
L	12.70	13.97	0.500	0.550
L1	2.79	5.84	0.110	0.230
ØP	3.54	4.08	0.139	0.161
Q	2.54	3.18	0.100	0.125

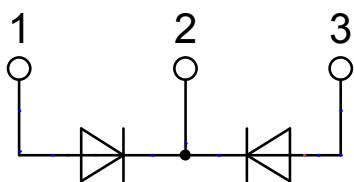

**Fast Diode**