


.187 HEX
[4.75]



NOTES:


1. MAX. MOUNTING TORQUE = 6 lb-in.
2. HARDWARE IS INCLUDED.

∅.250
[6.35]

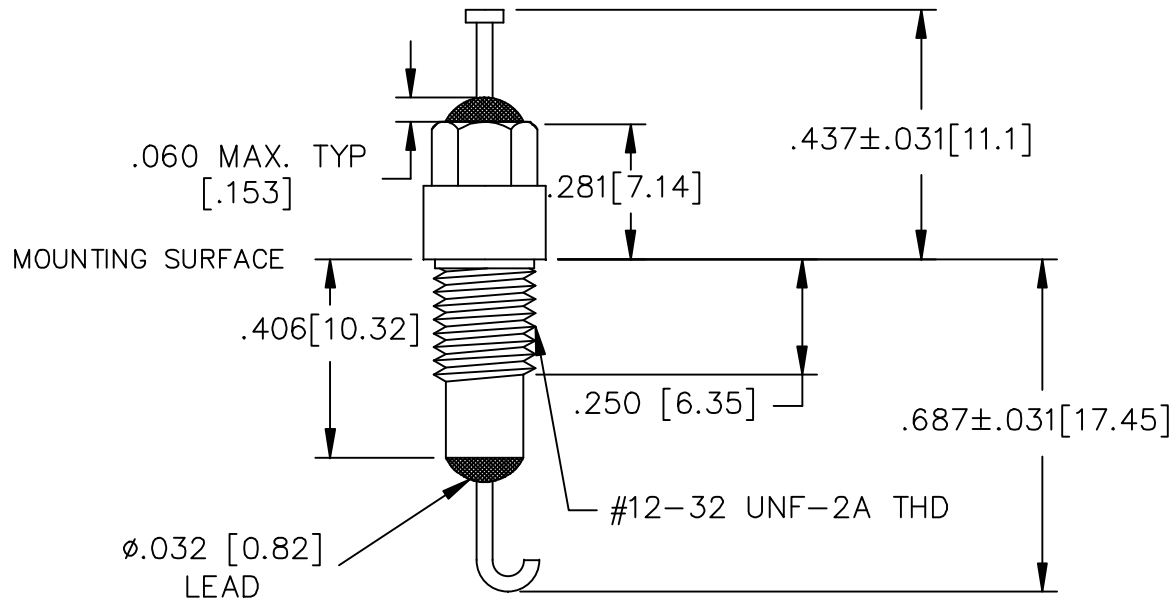

LEAD FINISH:	SOLDER
BUSHING FINISH:	SILVER
CAPACITANCE	5500pF \diamond 28
TEMP. RANGE	-55°C TO 125°C
CURRENT	10 AMP MAX.
WORKING VOLTAGE	125°C 300 VDC -----
D.C. RESISTANCE	.01ohms MAX.
MIN. I.L. PER MIL-STD-220 AT 25°C NO LOAD	
FREQ. MHz	I.L. (db)
50	50
100	65
1 GHz	70

SCHEMATIC



MARKING: PART: M15733/46-0001
BAG: MIL 15733/46-0001
OLSP2
DATE CODE
300VDC
+125°C
10 AMPS
QTY./BAG (100 MAX.)
P.O. NO.

NOTE: PACKAGE MARKED SAME AS BAG.

	28	27	26	REV. NO.	TOLERANCES UNLESS OTHERWISE SPECIFIED
	CN 208159	CN 205524	CN 185108	CHANGE NOTICE	Fractions ± 1/64
					Dec. .xx±
					Dec. .xxx±.010
					Angles ±0° 30'
					CODE IDENT. NO. OLSP2

SPECTRUM CONTROL INC.

ERIE, FAIRVIEW PENNSYLVANIA

Dwn. KAUFFMAN	Description Pi
DATE 7/29/02	RESIN SEAL FILTER
Ckd. *	
Scale NONE	51-709-004