

### Is Now Part of



## ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at <a href="https://www.onsemi.com">www.onsemi.com</a>

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA Class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, emplo



September 2014


# LM317M 3-Terminal 0.5A Positive Adjustable Regulator

### **Features**

- · Output Current in Excess of 0.5 A
- Output Adjustable Between 1.2 V and 37 V
- Internal Thermal Overload Protection
- · Internal Short-Circuit Current Limiting
- Output Transistor Safe Area Compensation
- Floating Operation for High Voltage Applications

### **Description**


The LM317M is a 3-terminal adjustable positive voltage regulator capable of supplying in excess of 500 mA over an output voltage range of 1.2 V to 37 V. This voltage regulator is exceptionally easy to use and requires only two external resistors to set the output voltage.



### **Ordering Information**

<b>Product Number</b>	Marking	Package	Packing Method	<b>Operating Temperature</b>
LM317MDTX	LM317MDT	TO-252 3L (D-PAK)	Tape and Reel	
LM317MDTXM	LM317MDT	TO-252 3L (D-PAK)	Tape and Reel	0 to +125°C
LM317MT	LM317M	TO-220 3L (Single Gauge)	Rail	

<sup>\*</sup> Refer to below unit orientation figure for TM / TF suffix packing.



### **Block Diagram**

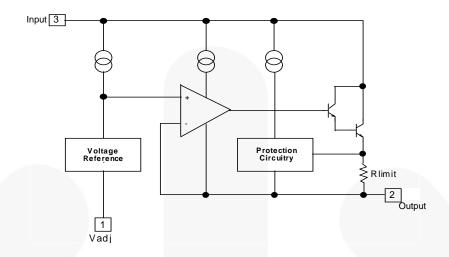


Figure 1. Block Diagram

### **Absolute Maximum Ratings**

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only. Values are at  $T_A = 25^{\circ}\text{C}$  unless otherwise noted.

Symbol	Parameter	Value	Unit
V <sub>I</sub> - V <sub>O</sub>	Input-Output Voltage Differential	40	V
T <sub>J</sub>	Operating Junction Temperature Range	0 to +125	°C
T <sub>STG</sub>	Storage Temperature Range	-65 to +125	°C

### **Thermal Characteristics**

Values are at  $T_A = 25$ °C unless otherwise noted.

		Va		
Symbol	Parameter	LM317MT	LM317MDTX / LM317MDTXM <sup>(1),(2)</sup>	Unit
P <sub>D</sub>	Power Dissipation	Internally Limited		W
$R_{\theta JC}$	Thermal Resistance, Junction to Case	5	-	°C/W
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient	81	100	°C/W

### Notes:

- 1. Thermal resistance test board size: 76.2 mm x 114.3 mm x 1.6 mm (1S0P), JEDEC standard: JESD51-3, JESD51-7
- 2. Assume no ambient airflow

### **Electrical Characteristics**

 $V_{I}$  -  $V_{O}$  = 5 V,  $I_{O}$  = 0.1 A,  $0^{\circ}C \le T_{J} \le$  +125°C,  $P_{DMAX}$  = 7.5 W, unless otherwise specified.

Symbol	Parameter	Conditions	Min.	Тур.	Max.	Unit	
Rline	Line Regulation <sup>(3)</sup>	$T_A = +25^{\circ}C, 3 \text{ V} \le \text{V}_I - \text{V}_O \le 40 \text{ V}$		0.01	0.04	%/ V	
Kilile		3 V ≤ V <sub>I</sub> –V <sub>O</sub> ≤ 40 V		0.02	0.07		
Rload	Load Regulation <sup>(3)</sup>	$T_A = +25^{\circ}C$ , 10 mA $\leq I_O \leq 0.5$ A, $V_O \leq 5$ V		5	25	mV	
		$T_A = +25$ °C, 10 mA $\leq I_O \leq 0.5$ A, $V_O \geq 5$ V		0.1	0.5	%/V <sub>O</sub>	
		10 mA $\leq$ I <sub>O</sub> $\leq$ 0.5 A, V <sub>O</sub> $\leq$ 5 V		20	70	mV	
		10 mA $\leq$ I <sub>O</sub> $\leq$ 0.5 A, V <sub>O</sub> $\geq$ 5V		0.3	1.5	%/V <sub>O</sub>	
I <sub>ADJ</sub>	Adjustment Pin Current	-		50	100	μΑ	
$\Delta I_{ADJ}$	Adjustment Pin Current Change	$3 \text{ V} \le \text{V}_{\text{I}} - \text{V}_{\text{O}} \le 40 \text{ V},$ $10 \text{ mA} \le \text{I}_{\text{O}} \le 0.5 \text{ A}, \text{P}_{\text{D}} < \text{P}_{\text{DMAX}}$		0.2	5.0	μΑ	
$V_{REF}$	Reference Voltage	$3 \text{ V} < \text{V}_{\text{I}} - \text{V}_{\text{O}} < 40 \text{ V},$ $10 \text{ mA} \le \text{I}_{\text{O}} \le 0.5 \text{ A}, \text{P}_{\text{D}} < \text{P}_{\text{DMAX}}$	1.20	1.25	1.30	V	
ST <sub>T</sub>	Temperature Stability	$T_J = 0$ °C to +125°C	<b>V</b>	0.7		%/V <sub>O</sub>	
I <sub>L(MIN)</sub>	Minimum Load Current to Maintain Regulation	V <sub>I</sub> - V <sub>O</sub> = 40 V		3.5	10.0	mA	
	Maximum Output Current	$V_I - V_O \le 15 V, P_D < P_{DMAX}$	0.5	0.9		А	
I <sub>O(MAX)</sub>		$V_1 - V_0 = 40 \text{ V}$ $P_D < P_{DMAX}, T_A = +25^{\circ}\text{C}$	0.15	0.25			
e <sub>N</sub>	RMS Noise, % of V <sub>OUT</sub>	T <sub>A</sub> = +25°C, 10 Hz < f < 10 kHz		0.003		%/V <sub>O</sub>	
RR	Ripple Rejection	$V_O = 10 \text{ V}, f = 120 \text{ Hz},$ without $C_{ADJ}$	66	65		- dB	
		$V_O = 10 \text{ V, f} = 120 \text{ Hz,}$ $C_{ADJ} = 10 \mu F^{(4)}$		80			
ST	Long-Term Stability	T <sub>J</sub> = +125°C, 1000 Hours		0.3	1	%/ 1000Hrs	

### Notes:

- 3. Load and Line regulation are specified at constant junction temperature. Change in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.
- 4. C<sub>ADJ</sub>, when used, is connected between the adjustment pin and ground.

### **Typical Performance Characteristics**




Figure 2. Minimum Load Current




Figure 3. Peak Output Current vs. Input-Output Differential Voltage




Figure 4. Adjustment Pin Current vs. Temperature

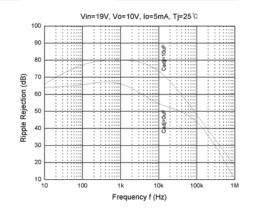


Figure 5. Ripple Rejection vs. Frequency




Figure 6. Load Regulation vs. Temperature

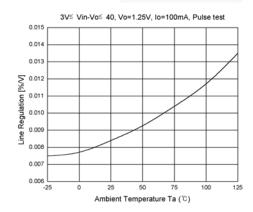


Figure 7. Line Regulation vs. Temperature

### **Typical Performance Characteristics** (Continued)




Figure 8. Output Voltage vs. Temperature

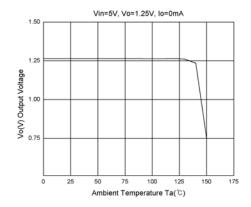


Figure 9. Thermal Shutdown

### **Typical Application**

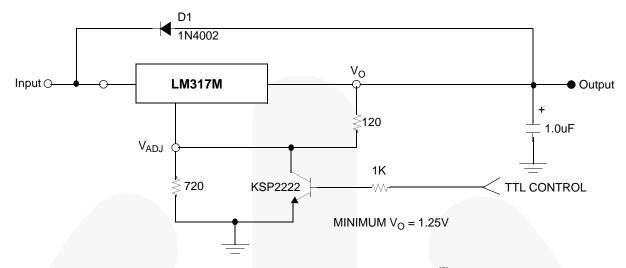


Figure 10. 15V Electronic Shutdown Regulator<sup>(5)</sup>

#### Note:

5. D1 protects the device during an input short circuit.


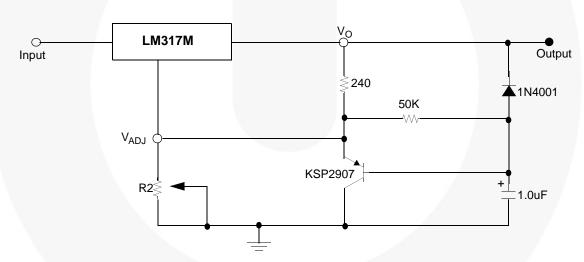


Figure 11. Slow Turn-On Regulator

### Typical Application (Continued)

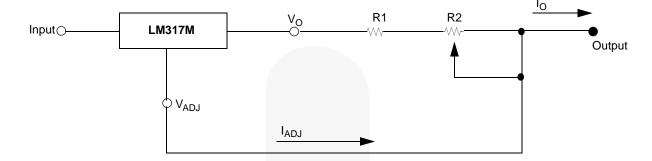


$$\begin{split} I_{OMAX} &= \left(\frac{V_{REF}}{R1}\right) + I_{ADJ} \cong \frac{1.25V}{R1} \\ I_{OMAX} &= \left(\frac{V_{REF}}{R1 + R2}\right) + I_{ADJ} \cong \frac{1.25V}{R1 + R2} \\ 5mA &< I_{O} < 500mA \end{split}$$

Figure 12. Current Regulator

# **Physical Dimensions** Α - 5.55 MIN → F 0.90 0.50 6.50 MIN 6.40 C 0.96 MAX (0.64 LAND PATTERN RECOMMENDATION 2.40 2.20 4.83 MIN (6.80) SEE DETAIL A F 9.80 9.20 □ 0.10 B **GAGE PLANE** NOTES:UNLESS OTHERWISE SPECIFIED NOT COMPLIANT TO JEDEC TO-252 VARIATION AB ALL DIMENSION ARE IN MILLIMETER DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSIONS LAD PATTERN PER IPC7351A ATANDARD TO228P991X239-3N DRAWING FILE NAME:MKT-TO252D03REV3. DOES NOT COMPLY JEDEC STANDARD VALUE. FAIRCHILD SEMICONDUCTOR. DETAIL A SCALE 10 : 1 SEATING PLANE

Figure 13. 3LEAD, TO-252, JEDEC TO-252 VAR. AB, SURFACE MOUNT (DPAK)

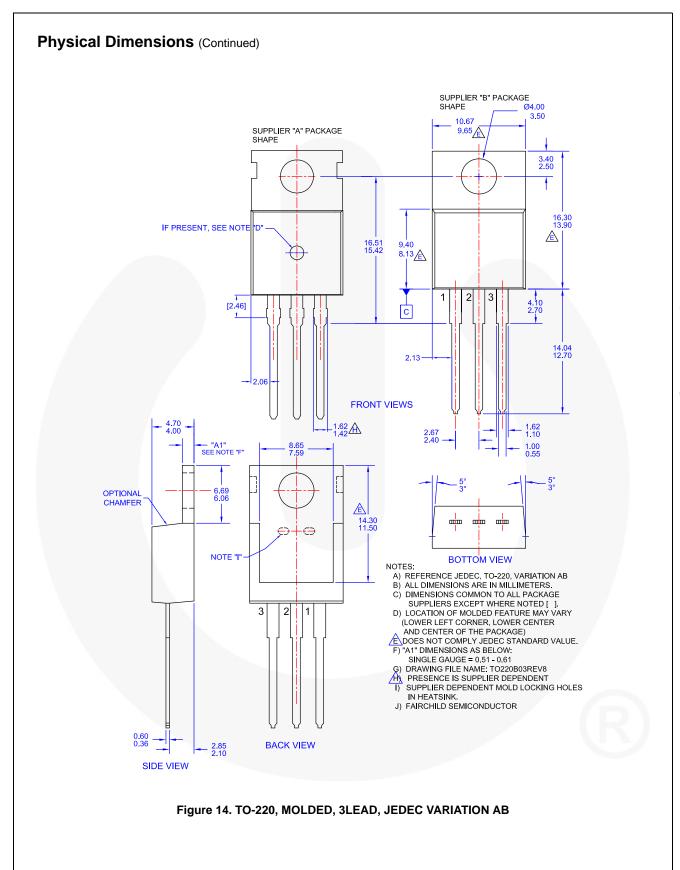





#### TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

AccuPower™ F-PFS™ Awinda® FRFET® AX-CAP®\* Global F

DEUXPEED® Making Small Speakers Sound Louder

Dual Cool™ and Better™
EcoSPARK® MegaBuck™
EfficientMax™ MICROCOUPLER™
ESBC™ MicroFET™

ESBC™ MicroFET™

MicroPak™
MicroPak™
MicroPak2™

Fairchild® MillerDrive™
Fairchild Semiconductor® MillerDrive™
FACT Quiet Series™ MotionGrid®
FAST® MTI®
FastvCore™ MTX®
FETBench™ FPS™ MVN®
FOOthHiT™

PowerTrench® PowerXS™

Programmable Active Droop™

QFĔT<sup>®</sup>
QS™
Quiet Series™
RapidConfigure™

Saving our world, 1mW/W/kW at a time™

SignalWise™ SmartMax™ SMART START™

Solutions for Your Success™

SPM®
STEALTH™
SuperFET®
SuperSOT™-3
SuperSOT™-6
SuperSOT™-8
SupreMOS®
SyncFET™
Sync-Lock™

TinyBoost®
TinyBoost®
TinyBuck®
TinyLogic®
TINYOPTO™
TinyPower™
TinyPWM™
TinyWire™
TranSiC™
TriFault Detect™
TRUECURRENT®\*\*

SerDes\*
UHC®
Ultra FRFET™
UniFET™
VCX™
VisualMax™
VoltagePlus™
XS™
Xsens™

μSerDes™

#### DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. TO OBTAIN THE LATEST, MOST UP-TO-DATE DATASHEET AND PRODUCT INFORMATION, VISIT OUR WEBSITE AT <a href="http://www.fairchildsemi.com">http://www.fairchildsemi.com</a>, FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

#### As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

#### ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, www.fairchildsemi.com, under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufacturers of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed applications, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address any warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

#### PRODUCT STATUS DEFINITIONS

#### **Definition of Terms**

Definition of Terms				
Datasheet Identification		Definition		
Advance Information	Formative / In Design	Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.		
Preliminary	First Production	Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.		
No Identification Needed	Full Production	Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.		
Obsolete	Not In Production	Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.		

Rev. I71

<sup>\*</sup> Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

ON Semiconductor and in are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdt/Patent-Marking.pdf">www.onsemi.com/site/pdt/Patent-Marking.pdf</a>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and exp

### **PUBLICATION ORDERING INFORMATION**

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800-282-9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative